

a4

asbestos essentials

Non-licensed tasks

This information will help employers and the self-employed to comply with the Control of Asbestos Regulations 2006.

It is also useful for trade union and employee safety representatives.

Asbestos fibres can cause lung cancer and lung diseases.

The sheet covers the points you need to follow to reduce exposure to an adequate level.

It can act as a risk assessment for asbestos if it matches what you plan to do.

Follow all the points, or use equally effective measures.

Only carry out this work if you are properly trained and have the right equipment.

Main points

- Asbestos fibres can kill.
- Keep exposures low using all the controls in this sheet.
- Also follow sheet a0 and equipment and method (em) sheets; see 'Essential information'.

Removing a single asbestos insulation board (AIB) panel, less than 1 m², fixed with nails or screws

What this sheet covers

This sheet describes good practice when you need to remove a single AIB sheet less than 1 square metre in area.

This sheet is NOT appropriate:

- when the AIB has more than minor damage or is heavily painted so its removal could damage adjacent panels;
- when the AIB is in the form of ceiling tiles or slats.
- for removing heavily nailed or centre-nailed panels;
- for soffits;
- for a panel larger than 1 square metre; or
- for removing more than two small panels a week.

Use an HSE-licensed contractor for such work.

Preparing the work area


- Ensure safe access.
- Restrict access - minimise the number of people present.
- Close doors. Use tape and notices to warn others.
- Ensure adequate lighting.

Equipment

- 500- and 1000-gauge polythene sheeting and duct tape;
- warning tape and notices;
- Class H vacuum cleaner (BS EN 60335) - see sheet em4;
- thick paste, eg wallpaper paste or shaving foam;
- sealant, eg polyvinyl acetate (PVA);
- permanent sealant
- magnet;
- screwdriver;
- garden-type sprayer containing wetting agent;
- paint brush;
- bucket of water and rags;
- asbestos waste container, eg labelled polythene sack;
- asbestos warning stickers; and
- clear polythene sack.

Personal protective equipment (PPE) - see sheet em6

- Provide:
 - disposable overalls fitted with a hood;
 - boots without laces (laced boots are hard to decontaminate); and
 - respiratory protective equipment.



SAFETY CHECKLIST

- ✓ Can you avoid disturbing asbestos by doing the job in some other way?
- ✓ Do you need a licence for the work?
- ✓ Always follow all legal requirements.
- ✓ Follow the task guidance sheet.
- ✓ Use an asbestos waste container.
- ✓ Dispose at a licensed disposal site.

Caution:



- Don't sweep up dust or debris - use a Class H vacuum cleaner or damp rags.
- Don't take used overalls home.
- Don't re-use disposable PPE.
- Don't smoke.
- Don't eat or drink in the work area.

OTHER HAZARDS

Work at height - see www.hse.gov.uk/falls/index.htm. Take precautions to avoid falls. Must you work from a ladder? Where necessary, erect an access platform.

Manual handling - see www.hse.gov.uk/msd/index.htm. Plan how to remove and handle heavy material and articles safely.

There may also be other hazards - you need to consider them all.

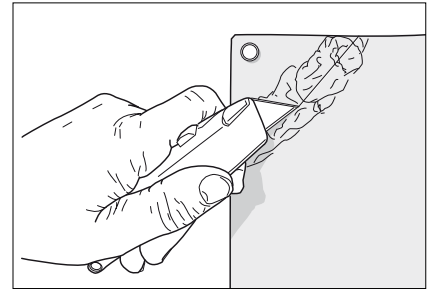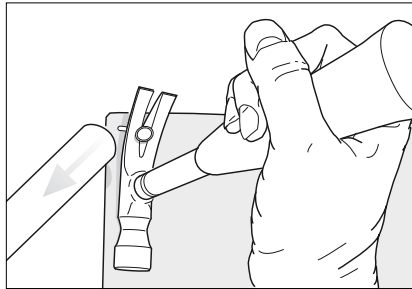

If possible, remove nails with a claw and shadow vacuuming. If this is difficult without damaging the board, apply paste to one corner and make a deep score line so you can lever the corner away first

Procedure

- Inspect carefully. If the AIB is in good condition and is unlikely to get damaged upon removal, follow this sheet.
- If the board is badly damaged or likely to get damaged, use an HSE-licensed contractor.


Panel with nails

Caution: If the panel has nails in the centre, the job needs an HSE-licensed contractor.

- Erect a mini-enclosure - see sheet em3.
- If you can remove nails with the claw, do so with 'shadow vacuuming' - see sheet em4.
- If this is not possible you need to break the panel across one corner. Cover the intended break line with paste/foam.
- Deeply score the panel across one nailed corner through the paste / foam.
- Lever to break the panel at the scored line - hold the vacuum nozzle near to the break to collect as much dust as possible.
- Ease the panel away to loosen other nails, and remove these with shadow vacuuming.
- Remove the panel and vacuum all newly-exposed surfaces.

Panel with screws

- Protect nearby surfaces from contamination. Cover with 500-gauge polythene sheeting and fix with duct tape to non-asbestos surfaces.
- Locate steel screws with the magnet. Locate brass screws by careful paint scraping.
- Use 'shadow vacuuming' to control dust - see sheet em4.
- Unscrew - put the screws in the waste container.
- Ease the panel away. Vacuum its newly-exposed surfaces and screw holes.

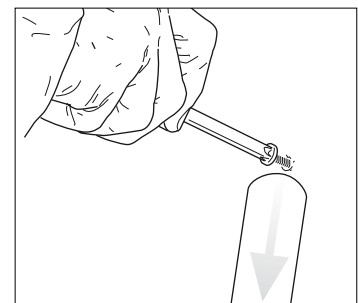

Use shadow vacuuming to control dust as you remove screws

All panels

- Spray the panel with PVA.
- Double-wrap large panels with 1000-gauge polythene sheeting; place smaller boards in the waste container.
- Attach asbestos warning stickers.
- Gently paint newly-exposed surfaces and screw holes with sealant paint.

MORE HELP

- **Licensed asbestos contractors, and training providers** - HSE's Infoline
Tel: 0845 345 0055
Textphone: 0845 408 9577
e-mail: hse.infoline@natbrit.com
and at www.hse.gov.uk/asbestos/licensing/index.htm
- **HSE priced and free publications** - HSE Books
Tel: 01787 881165
and at www.hsebooks.co.uk
- **Qualified hygienists** - The British Occupational Hygiene Society (BOHS)
Tel: 01332 298101
and at www.bohs.org/ under 'Professional > Consultants'
- **Trade associations** - the Asbestos Removal Contractors Association (ARCA)
Tel: 01283 531126 Website: www.arcaweb.org.uk, or the Asbestos Control and Abatement Division (ACAD)
Tel: 01325 466704
- **Disposal of asbestos waste** - www.environment-agency.co.uk, www.sepa.org.uk/, or www.netregs.gov.uk/netregs.
- **More asbestos pictures and help to decide if work is licensed**
www.hse.gov.uk/asbestos/index.htm

ESSENTIAL INFORMATION

Download and follow these advice sheets from www.hse.gov.uk/asbestos/essentials/index.htm:

- em1 *What to do if you uncover or damage materials that could contain asbestos*
- em2 *Training*
- em3 *Building and dismantling a mini-enclosure*
- em4 *Using a Class H vacuum cleaner for asbestos*
- em5 *Wetting asbestos materials*
- em6 *Personal protective equipment (PPE)*
- em7 *Using damp rags to clean surfaces of minor asbestos contamination*
- em8 *Personal decontamination*
- em9 *Disposal of asbestos waste*

Cleaning and disposal

- Clean any newly-exposed surfaces with the Class H vacuum cleaner.
- Clean a mini-enclosure with the Class H vacuum cleaner and dismantle it as advised in sheet em3.
- Clean the area and equipment with the Class H vacuum cleaner and damp rags.
- Put debris, used rags, polythene sheeting, paintbrush and other waste in the asbestos waste container and tape it closed.
- Put the asbestos waste container in a clear polythene sack and tape it closed.
- Disposal - see sheet em9.

Personal decontamination

- See sheet em8

Clearance and checking off

- Visually inspect the area to make sure that it has been cleaned properly.
- Clearance air sampling is not normally required.
- Get the premises owner, duty-holder or client to check off the job.

This document is available at www.hse.gov.uk/asbestos/essentials/index.htm

© Crown copyright This publication may be freely reproduced, except for advertising, endorsement or commercial purposes. First published as part of *Asbestos Essentials Task Manual 2001*. Please acknowledge the source as HSE.

Published by the Health and Safety Executive 12/07

This guidance is issued by the Health and Safety Executive. Following the guidance is not compulsory and you are free to take other action. But if you do follow the guidance you will normally be doing enough to comply with the law. Health and safety inspectors seek to secure compliance with the law and may refer to this guidance as illustrating good practice.